

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.


**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.**

PCTWORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : F23D 11/36	A1	(11) International Publication Number: WO 99/47855 (43) International Publication Date: 23 September 1999 (23.09.99)
(21) International Application Number: PCT/US99/05826 (22) International Filing Date: 17 March 1999 (17.03.99) (30) Priority Data: 4208 20 March 1998 (20.03.98) KR (71) Applicant (for all designated States except US): CALICO BRANDS, INC. [US/US]; 13455 Estelle Street, Corona, CA 91719 (US). (72) Inventor; and (75) Inventor/Applicant (for US only): JON, Jong-Koo [KR/KR]; 117-dong, Apt. 1401 Hyun-dae Apt., 307, Bun-ji, San-gog 3 dong, Bupyung-gu, In-cheon, Kwang-yeoksi (KR). (74) Agent: TROJAN, R., Joseph; Trojan Law Offices, Suite 325, 9250 Wilshire Boulevard, Beverly Hills, CA 90212 (US).		(81) Designated States: CA, CN, JP, US, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published With international search report.

(54) Title: MULTI-PURPOSE GAS LIGHTER WITH IGNITION-RESISTANT FUNCTION

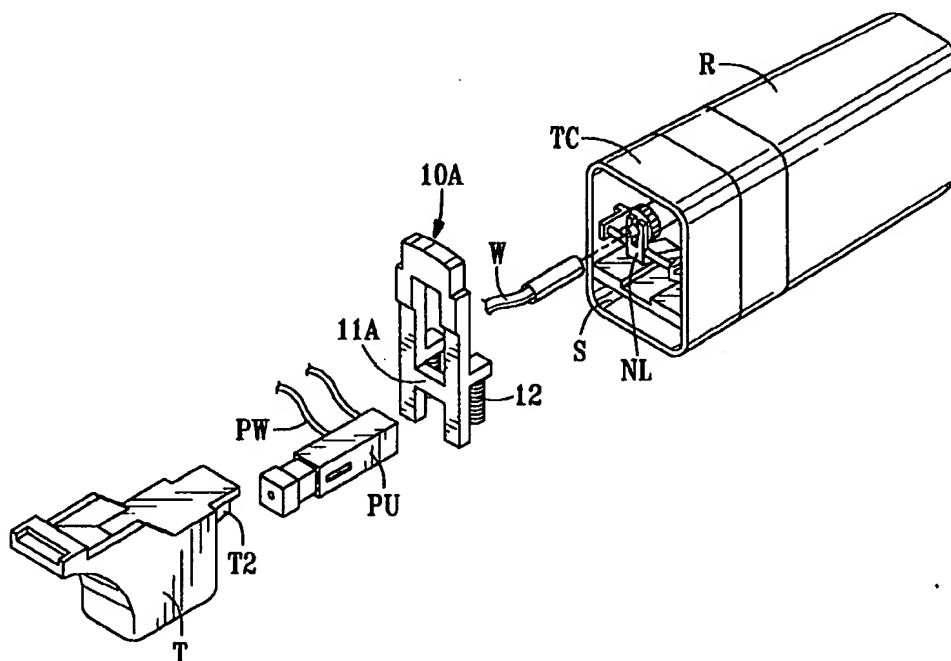

(57) Abstract

A child resistant utility lighter as shown in figures 1 through 5, having a conventional utility lighter construction, the improvement comprising a protruded lever (T1, T2), a U-shaped ignition resistant button (10), a stopper (11, 11A), and a spring (12). The stopper (11, 11A) and protruded lever (T1, T2) are aligned parallel with each other preventing the production of a spark and the release of fuel unless the ignition resistant button (10) is simultaneously depressed. After use of the utility lighter, the spring (12) urges the ignition resistant button (10) upward, automatically restoring the ignition resistant function.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

DESCRIPTION

5 Multi-Purpose Gas Lighter with Ignition-Resistant Function

10 Inventor: Jon, Jong-Koo

15 1. TECHNICAL FIELD:

This invention relates to child-resistant utility lighters.

20 2. BACKGROUND ART:

Utility lighters are very useful and have become quite prevalent in modern society. Utility lighters of the type
25 described herein generally contain a handle and an elongated nozzle pipe. The shape and operation of utility lighters allow for several advantages over normal means of
30 producing a flame. Most significantly, due to the elongated nature of the nozzle pipe, utility lighters
35 enable the operator to stand a safe distance away from the object to be ignited before actuating the lighter, thus avoiding a large number of potential accidents. In
40 addition, utility lighters allow a flame to be produced in hard-to-reach or narrow places, where the human hand
45 holding a match would not normally fit. Still, in the hands of children, or others who do not know how to safely and properly operate the lighter, such lighters are as
50 dangerous as any other spark and/or flame-producing device. Therefore, a need has been realized to equip utility lighters with safety features that minimize

accidental or improper use by inexperienced persons,
especially young children.

5

Many inventions have been created to address this
10 safety-related concern. Generally, these inventions have
sought to introduce safety mechanisms that disable
automatic operation of either the spark-generation and/or
15 the fuel-release function of the lighter. For example,
some utility lighters provide for a blocking mechanism,
20 where the actuating trigger is blocked from moving the
required distance for a spark to be generated. As
depicted in Figure 6, the locking mechanism is normally
25 de-activated by sliding an "on/off" switch to the "on"
position, or by other means, so as to remove the
30 impediment from the actuating trigger's operating path.

Although utility lighters of the type described above
35 provide some level of safety, there is much room for
improvement. Specifically, in these lighters, once the
"on/off" switch is disabled, the lighter remains in the
40 unlocked state until the locking mechanism is activated
again. Therefore, if the operator disables the locking
45 mechanism in order to use the lighter, and then forgets to
re-lock the lighter, the safety feature of the lighter is
50 rendered useless, until the locking mechanism is again
activated.

Other inventions have attempted to address the safety-

related issues by impeding not the operation of the trigger, but that of the fuel-release mechanism. Of
5 course, a utility lighter containing such a mechanism would inhibit flame generation in the locked position as
10 no fuel would be released until the locking mechanism has been deactivated. However, in these types of lighters, nothing prevents a spark from being generated. As such,
15 the safety goals are only partially met in these types of lighters since young children handling the lighter could still create fires by operating the lighter in close
20 proximity to a source of fuel or near carpets, paper, or other flammable material. In addition, the same disadvantages that were discussed above with respect to
25 trigger-locking mechanisms apply equally well to fuel-release disabling mechanisms.
30

Therefore, there is a need for a device that not only
35 achieves the stated safety goals, but also is amenable to operation with relative ease. The invention described herein offers such a combination. The invention requires
40 that an ignition resistant button, located on the exterior surface of the handle be depressed simultaneously with the
45 trigger before a flame can be produced. In this way, young children are coaxed into believing that they can operate the lighter in the usual way, i.e., by pressing
50 the trigger. However, such operation will produce neither a spark nor a flame. Moreover, given the position of the ignition resistant button relative to the trigger, the

simultaneous operation of both the trigger and the
ignition resistant button can be performed by one hand of
5 the intended adult user for ease of operation. However,
the smaller size of a child's hand makes it difficult for
10 a child to engage both the ignition resistant button and
the trigger simultaneously with just one hand. Further,
after each use, the ignition resistant mechanism
15 automatically engages, eliminating the need to remember to
re-lock the lighter.

20

3. DISCLOSURE OF INVENTION:

The primary object of this invention is to provide an
25 automatic safety mechanism for utility lighters so that
children or inexperienced users will be less likely to
inadvertently activate the lighter. Such a safety feature
30 is especially important because young children often play
with lighters as toys and because lighters have
35 mechanically moveable parts that make them attractive to
children as toys. Further, the automatic safety
40 mechanism relieves the user of the burden of having to
remember to activate the safety mechanism after each use.

45

Another object of the present invention is to prevent
the generation of not only a flame, but even a spark. As
50 noted previously, in a lighter where only the fuel-release
mechanism is inhibited in the locked state, young children
playing with the lighter can still use the lighter to
create sparks. Depending on the child's surroundings,

5 this can lead to the start of accidental fires if the child is operating the lighter near paper products or any other source of flammable material.

10 A further object of the invention described herein is to provide an improved device for maximizing safety in utility lighters without compromising ease of use. To
15 this end, the invention permits the intended adult user to operate the utility lighter with only one hand.

20 The invention meets its objectives by providing an ignition resistant button that must be depressed
25 simultaneously with the trigger to produce a spark and a flame. The ignition resistant button is positioned on the exterior surface of the handle at a location behind the
30 trigger. Typically, a young child will attempt to activate the lighter by depressing only the trigger.
35 However, when this is done, neither a spark nor a flame will be generated as the trigger is stopped along its path by a stopper before the spark-producing mechanism can be
40 activated. In addition, the placement of the ignition resistant button permits the intended adult user to use
45 only one hand when operating the lighter, however, it is difficult for a child with smaller hands than an adult to depress both the ignition resistant button and the trigger
50 with one hand.

The only way to activate the lighter is to depress the

5 ignition resistant button simultaneously with sliding the
trigger towards the back and activating the spark-
producing mechanism. This is a simple, yet effective
concept. Nevertheless, it is a concept that a young child
10 operating the lighter must recognize and grasp before
he/she can successfully operate the lighter. In most
cases, the child will not recognize the usefulness of the
15 ignition resistant button and will abandon the lighter
after several unsuccessful attempts. Further, when the
20 ignition resistant button and trigger are released, the
safety mechanism automatically engages eliminating the
need to remember to re-lock the lighter.

25

Moreover, even if a child does attain an appreciation
30 for the interrelationship between the ignition resistant
button and the production of a flame, he/she will still
have difficulty activating the lighter. The portion of
35 the ignition resistant button that is exposed is located
on exterior surface of the lighter housing at a position
behind the trigger. As such, the smaller size of a
40 child's hand does not permit a child to depress the
ignition resistant button and the trigger simultaneously.

45

Finally, as can be understood from the above
50 description, the invention disclosed herein achieves its
safety objectives without making operation of the lighter
any more cumbersome than a regular utility lighter with no
safety feature. Specifically, the ignition trigger is

shaped and positioned in such a way that operation of the lighter is very simple in experienced hands. An adult user familiar with the operation of utility lighters need use only hand to activate the lighter as he/she would depress the ignition resistant button with his/her thumb while simultaneously depressing the trigger with his/her finger. This allows the user to operate the lighter in a safe, yet non-complicated manner.

This and other advantages of the present invention will become more apparent through the following description of the drawings and detailed description of the preferred embodiment.

4. BRIEF DESCRIPTION OF THE DRAWINGS:

Figure 1 is a perspective view of a lighter of a first embodiment of the present invention,

Figure 2 is a perspective view of a lighter of a first embodiment of the present invention, showing a condition wherein one shell is separated from the other shell exposing the internal structure of the lighter,

Figure 3 is a perspective view of a lighter of a first embodiment of the present invention, showing a condition wherein the trigger and ignition resistance button is separated from the main housing,

Figure 4a is a vertically cross-sectional view of the lighter of the first embodiment,

Figure 4b is a vertically cross-sectional view of

the lighter of the first embodiment of the present invention while in use,

5 **Figure 5** is a perspective view of a lighter of a second embodiment of the present invention, showing a condition wherein the trigger and ignition resistance button is separated from the main housing,

15 **Figure 6** is a perspective view of a prior art lighter with an "on/off" switch.

20 5. BEST MODE FOR CARRYING OUT THE INVENTION AND INDUSTRIAL APPLICABILITY:

25 Figures 1 through 4(b) generally illustrate the best mode of the present invention, a multi-purpose gas lighter with ignition resistant function. The lighter is constructed of a handle (H), a nozzle pipe (NP) attached to the forward end of the handle (H) via engagement means, 30 a actuating trigger (T), a piezoelectric unit (PU), a nozzle lever (NL) that translates the motion of the trigger (T) to open a nozzle (N), and a fuel reservoir (R).

45 The handle (H) is comprised of two shells (C), cut along the longitudinal axis of the lighter, having an exterior surface and an internal cavity. Fig. 2 shows one 50 of these shells (C) separated from the other shell and exposing the internal structure of the lighter. The cavity houses the internal components of the lighter,

including a fuel reservoir (R), a nozzle (N), a nozzle lever (NL), and a piezoelectric unit (PU).

5

The lighter is equipped with a fuel reservoir (R),
10 having a forward end and a rear end, located near the back
end of the handle (H). A fuel-release nozzle (N) is
attached to the forward end of the fuel reservoir (R) and
15 controls the emission of fuel. This nozzle (N) is spring
loaded so that it is normally urged to a closed position.
20 A fuel tube (W) is connected to the nozzle (N) and extends
the length of the nozzle pipe (NP) to a discharge nozzle
(not shown) at the free end of the nozzle pipe. A nozzle
25 lever (NL) engages the nozzle (N) and translates the
motion of the trigger to open the nozzle (N) and release
30 fuel.

A trigger (T), having an interior portion and
35 operational portion, is slidably mounted between the two
shells of the handle (H) and is allowed to slide back and
40 forth along the longitudinal axis of the lighter. The
interior portion has means for engaging the nozzle lever
(NL) and is also fixedly attached to a piezoelectric unit
45 (PU) which creates an electric discharge that is carried
to the free end of the nozzle pipe (NP) via a wire (PW) to
50 ignite the released fuel. A protruded lever (T1) is
formed on the interior portion in a parallel direction
with the trigger (T). The operational portion is opposite
the interior portion and exposed to the user.

5 The new and novel improvement of the present invention
includes the addition of an ignition resistant function.
One of the primary elements of the ignition resistant
10 function is a U-shaped ignition resistant button (10).
The ignition resistant button (10) has a finger pad and at
15 least two supporting legs. The finger pad is exposed on
the exterior surface of the handle (H) from an air hole
(C1) located at a position behind the trigger (T). The
20 supporting legs are contained within the internal cavity
of the handle (H) and flare outward to create ledges that
prevent the ignition resistant button (10) from falling
25 out of the air hole (C1). Springs (12) are attached to
the supporting legs urging the ignition resistant button
30 (10) upward towards an "off" position. A stopper (11) is
attached to at least one supporting leg and is positioned
parallel to the protruded lever (T1).
35

As shown in Figure 4a, when the lighter is not in use,
40 the protruded lever (T1) is parallel and aligned with the
stopper (11). In this position, if a user depresses the
trigger (T) without depressing the ignition resistant
45 button (10), the protruded lever (T1) abuts the stopper
(11) preventing the activation of the piezoelectric unit
(PU) and the nozzle lever (NL). However, during operation
50 (as shown in Figure 4b), the ignition resistant button
(10) is depressed moving the stopper (11) downward and
away from the protruded lever (T1). At this position,

when the trigger is depressed, the protruded lever (T1) does not abut the stopper (11) and the trigger (T) activates the piezoelectric unit (PU) and engages the nozzle lever (NL) to open the nozzle (N) and release fuel. When the trigger (T) and ignition resistant button (10) is released after use, the springs (12) urge the ignition resistant button (10) upward such that the stopper (11) is re-aligned with the protruded lever (T1).

In another embodiment, the position of the stopper (11A) and the protruded lever (T2) are slightly modified. As shown in Figure 5, the stopper (11A) is positioned between the supporting legs of the ignition resistant button (10) and is parallel to the protruded lever (T2). The protruded lever (T2) is located at the rear of the internal portion of the trigger (T) and extends parallel towards the stopper (11A). During operation, the ignition resistant button (10) is depressed, moving the stopper (11A) downward and away from the path of the protruded lever (T2) thereby permitting the trigger (T) to activate the piezoelectric unit (PU) and engage the nozzle lever (NL).

Unless a young child appreciates the need to depress the ignition resistant button simultaneously with the trigger, the child will not be able to ignite the lighter. Therefore, this invention adds additional analytical steps to the process of understanding the operation of the

lighter which impedes the ability of small children to use
the lighter. In addition, although the position of the
5 ignition resistant button relative to the trigger is
comfortably positioned for use by the intended adult user,
10 a child with smaller hands will not be able to depress the
ignition resistant button and the trigger with one hand.

15

20

25

30

35

40

45

50

What is claimed is:

5 1. An ignition resistance mechanism in a utility lighter
comprised of a handle (H) having a back end and a forward
end, a nozzle pipe (NP) with an engagement end and a free
10 end, the engagement end being attached to the forward end
of the handle (H) and the free end constituting the tip of
the lighter, and the handle (H) being provided with:

15 A. a fuel reservoir (R) having a forward end and a
rear end,

20 B. a fuel nozzle (N) attached to the forward end of
said fuel reservoir (R) and having a closed position and
an open position for controlling the discharge of fuel
25 into the fuel pipe (W), said fuel pipe (W) extending from
said fuel nozzle (N) to the free end of the nozzle pipe
30 (NP),

C. a fuel release nozzle lever (NL) for translating
the movement of the trigger (T) and engaging said fuel
35 nozzle (N) from the closed position and an open position,
the fuel-release nozzle lever (NL) being spring loaded to
urge said fuel nozzle (N) to the closed position,
40

D. a piezoelectric unit (PU), for generating a
discharge voltage that is carried by a wire (PW) to the
45 free end of the nozzle pipe (NP) to ignite the fuel,

E. a trigger (T) slidably mounted on said handle (H)
50 and having an internal portion and an operational portion,
with the internal portion attached to said piezoelectric
unit (PU) and said operational portion exposed from the
handle (H) to the user,

wherein the improvement comprises:

5 F. a protruded lever (T1) fixed to said internal portion of the trigger (T) and extending horizontally towards the back end of the handle (H);

10 G. a U-shaped ignition resistant button (10) having a finger pad and at least two supporting legs, said finger pad protruding out of a formed air hole (C1) on the
15 surface of the handle, and said supporting legs having a ledge formed immediately beneath the surface of the handle to prevent said ignition resistant button (10) from
20 falling out of the handle (H),


25 H. a stopper (11) attached to at least one supporting leg and extending parallel towards said protruded lever,

30 I. return springs (12) fixed to said supporting legs, said springs (12) urging the ignition resistance button (10) upward.
35



2. An ignition resistance mechanism in a utility lighter
40 as in claim 1, wherein the stopper (11A) is positioned between the supporting legs of the ignition resistant button (10) and the protruded lever (T2) is positioned at
45 the rear of the internal portion of the trigger (T) and extends parallel towards the stopper (11A).

50

1/4

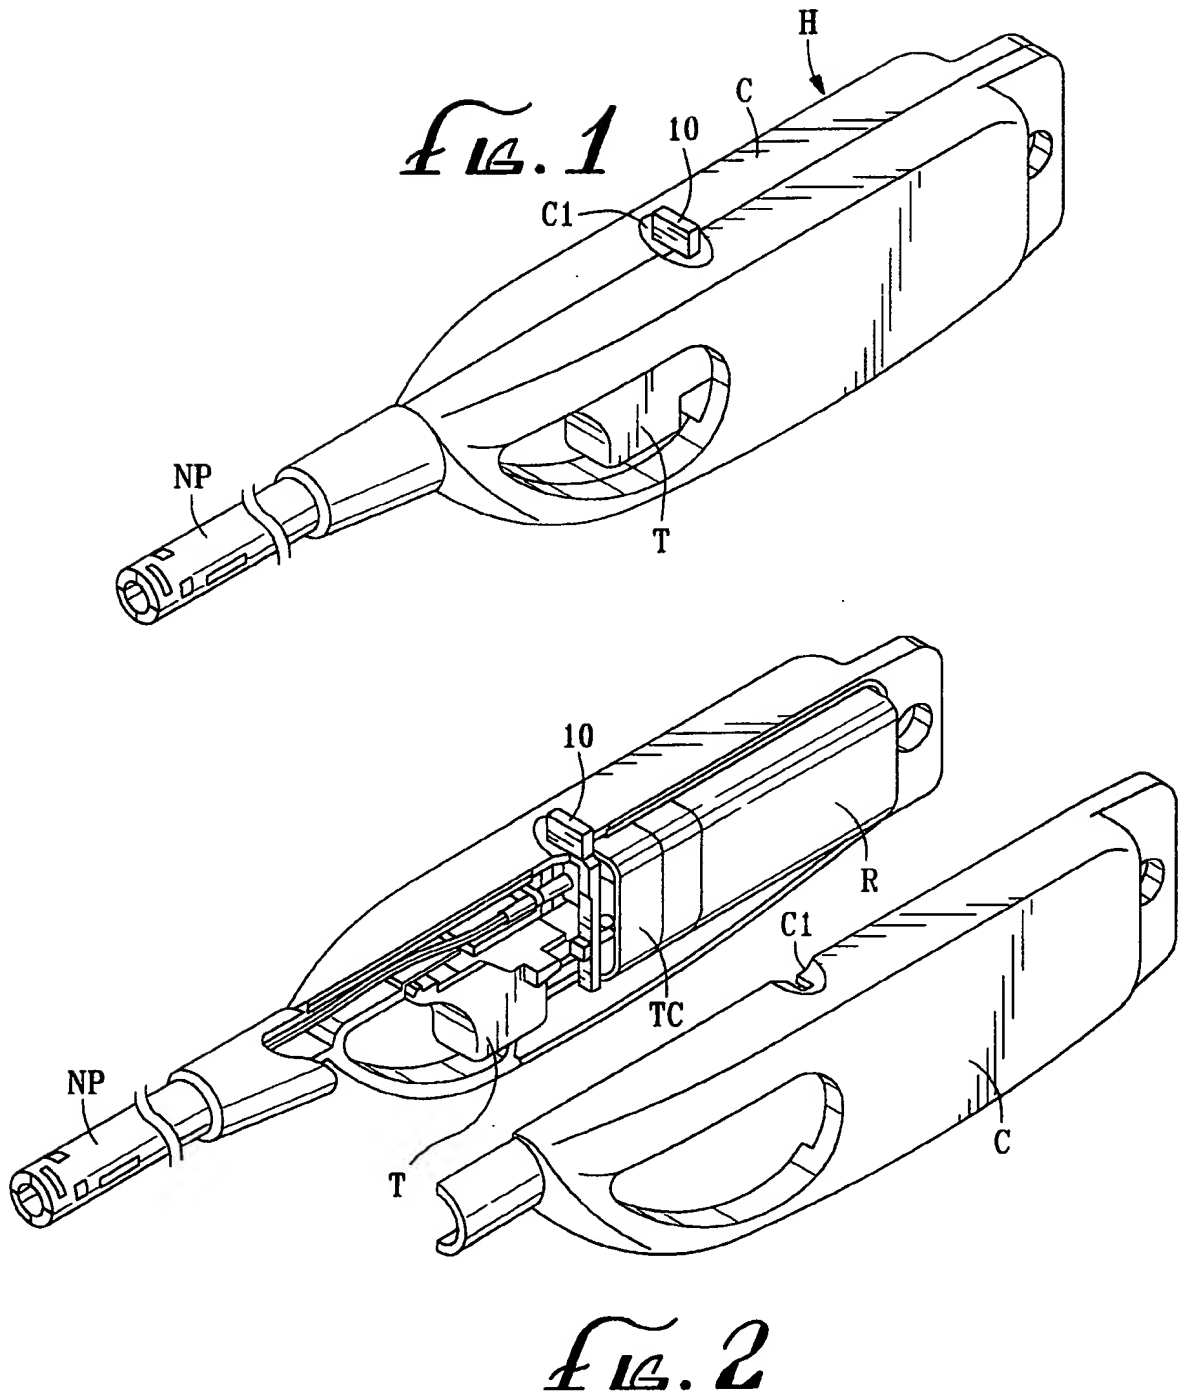

2/4

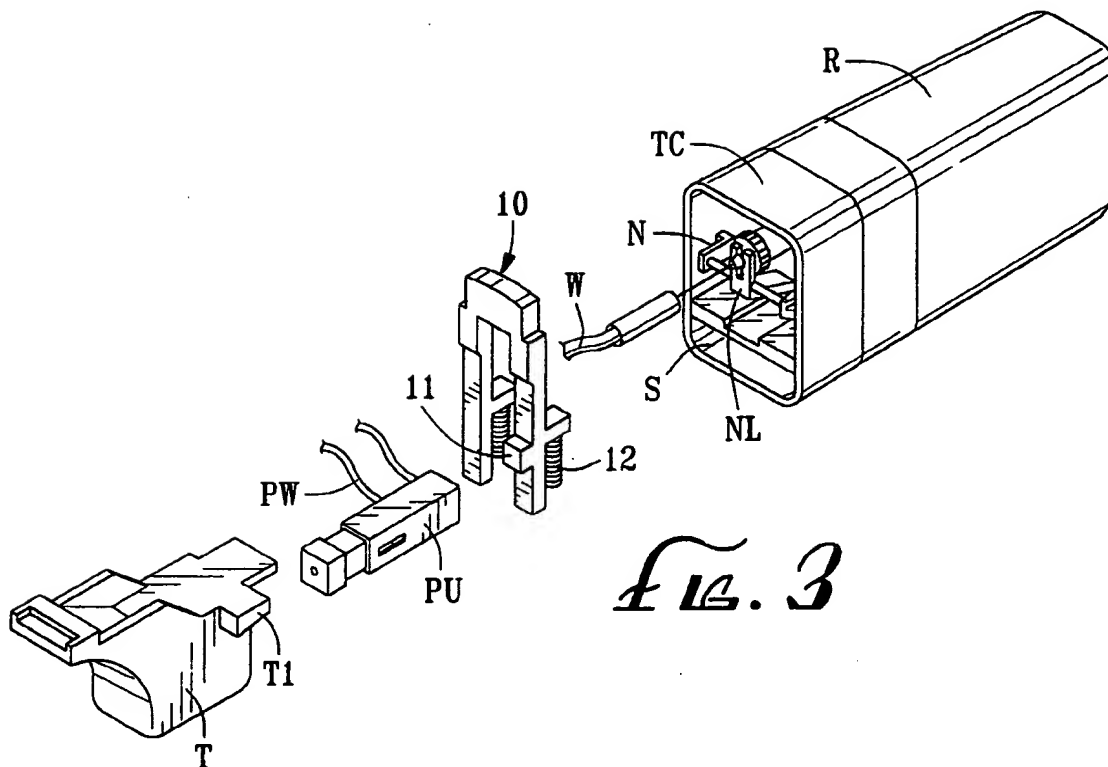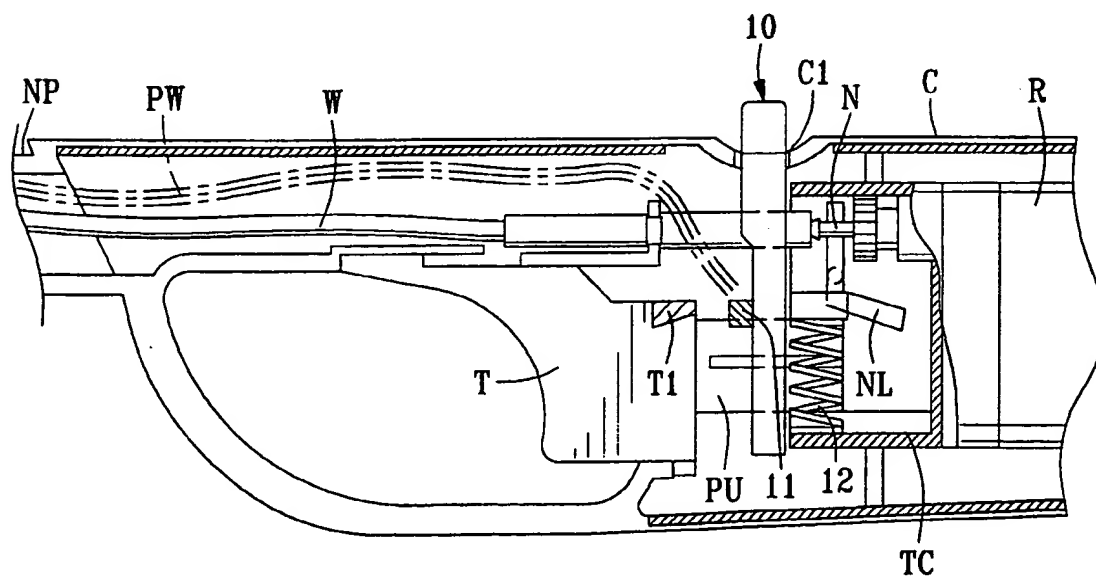*Fig. 3**Fig. 4A*

3/4

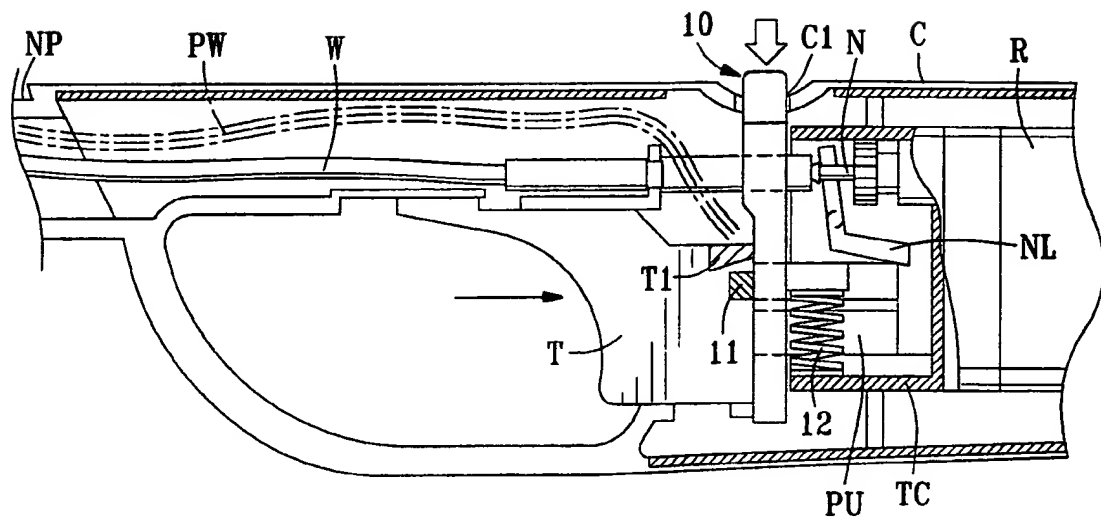
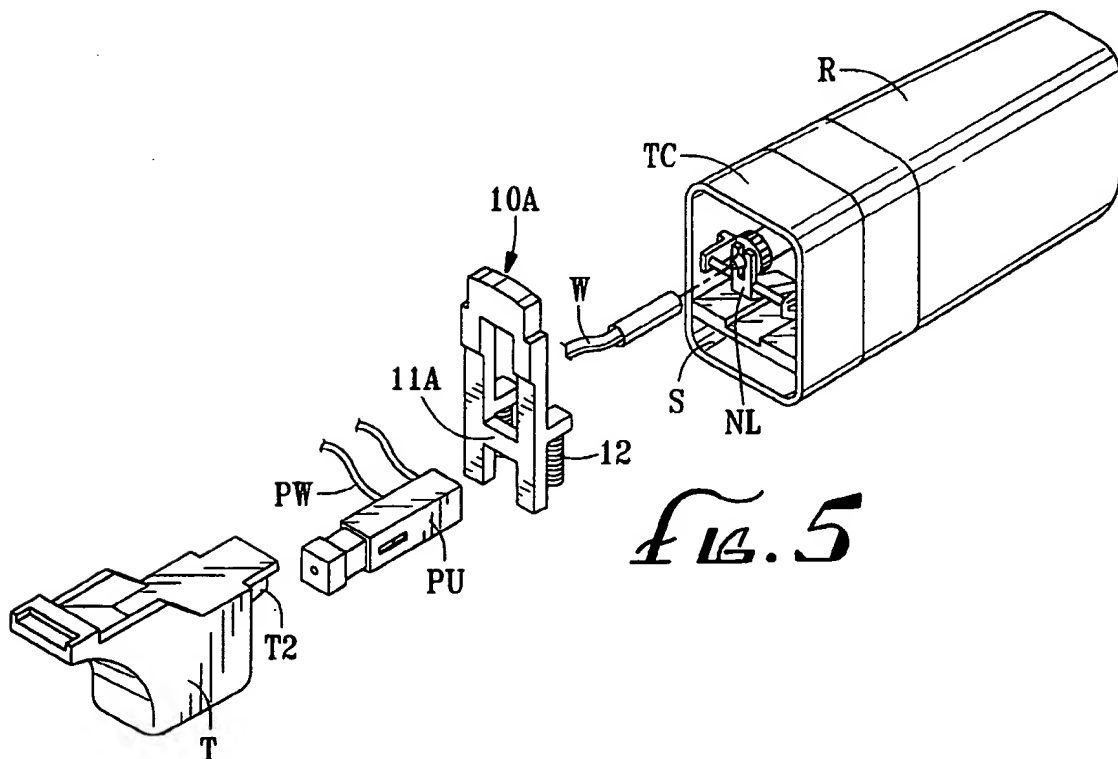

$$f_{LG} \cdot AB$$


Fig. 5

4/4

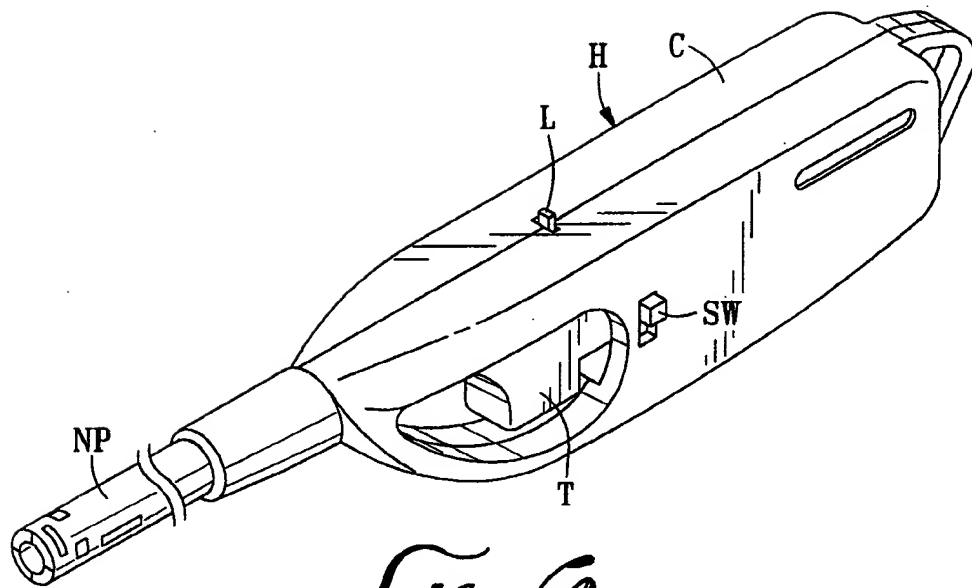


Fig. 6

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US99/05826

A. CLASSIFICATION OF SUBJECT MATTER

IPC(6) : F23D 11/36

US CL : 431/153,255,266,344,345; 126/25B

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 431/153,255,266,344,345; 126/25B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

NONE

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

NONE

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5,697,775 A (SAITO ET AL) 16 December 1997, see figures 4A and 4B; elements 20,20C,26,27,27B,28.	1-2
A	US 5,496,169 A (CHEN) 05 March 1996, see the entire document.	1-2
A	US 5,451,159 A (KIM) 19 September 1995, see the entire document.	1-2

☐ Further documents are listed in the continuation of Box C.☐ See patent family annex.

* Special categories of cited documents:	*T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
A document defining the general state of the art which is not considered to be of particular relevance	*X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
B earlier document published on or after the international filing date	*Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	*A* document member of the same patent family
O document referring to an oral disclosure, use, exhibition or other means	
P document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search

06 MAY 1999

Date of mailing of the international search report

27 MAY 1999

Name and mailing address of the ISA/US
Commissioner of Patents and Trademarks
Box PCT
Washington, D.C. 20231

Facsimile No. (703) 305-3230

Authorized officer

CARL D. PRICE

Telephone No. (703) 308-1953